



# CARGO FLOOR<sup>®</sup>

HORIZONTAL LOADING-/UNLOADING SYSTEM

## STEEL PROFILE SOLUTIONS




### Highlights:

- Pressure seal by steel overlap (no plastic seal)
- Smooth surface (also pallets, bales, etc.)
- Easy cleaning (no rest material)
- Interchangeable with standard Cargo Floor slats
- High wear resistance
- Also in Hardox 400 or equivalent
- High Impact resistance
- Can be driven on by a fork-lift truck
- High temperature resistance
- Easy mounting
- Low weight +/- 600 kgs\*

\*Compared to 10 mm alu floor

[www.cargofloor.nl](http://www.cargofloor.nl)

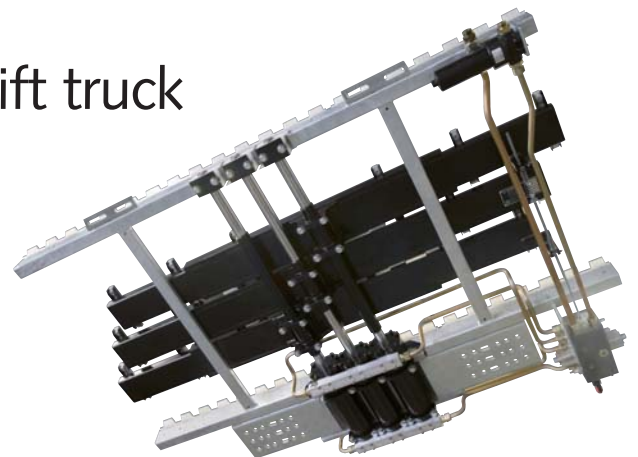

# Why a smooth STEEL Floor?

"Transport of abrasive materials without concessions"

Suitable for:




Sand



Aggregates



Pebbles

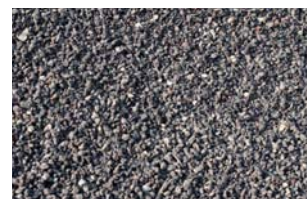

Recycled asphalt



Stones



Glass



Steel scrap



Aluminium scrap



## CARGO FLOOR®

HORIZONTAL LOADING-/UNLOADINGSYSTEM

Cargo Floor B.V.

PO Box 271  
7740 AG COEVORDEN  
Byte 14  
7741 MK COEVORDEN  
The Netherlands  
Telephone +31 (0)524-59 39 00  
Telefax +31 (0)524-59 39 99  
www.cargofloor.nl  
E-mail: info@cargofloor.nl



ISO 9001 - 2000  
Certified company

**WORLDWIDE  
SERVICE NETWORK**